

# WGen3600DF



3600 Watt Open Frame

Dual Fuel (Gas/LPG) Portable Generator

Gas: 3600W Running 4650W Peak | Propane: 3240W Running 4180W Peak

Rugged roll bars for added strength and protection

Fuel gauge on top of 4 gal. gas tank



50 State and Canada Model

Push button electric start, lights up green when unit is on

RV and camper ready TT-30R outlet


Fuel selector switch allows to easily switch from gas to propane without shutting off the unit

Battery charging port (charger included)

Dependable 5.9 HP 212cc OHV 4-Stroke Westinghouse engine

Remote start key fob included for starting and stopping generator up to 109 yards away

Propane hook up (LPG hose included)

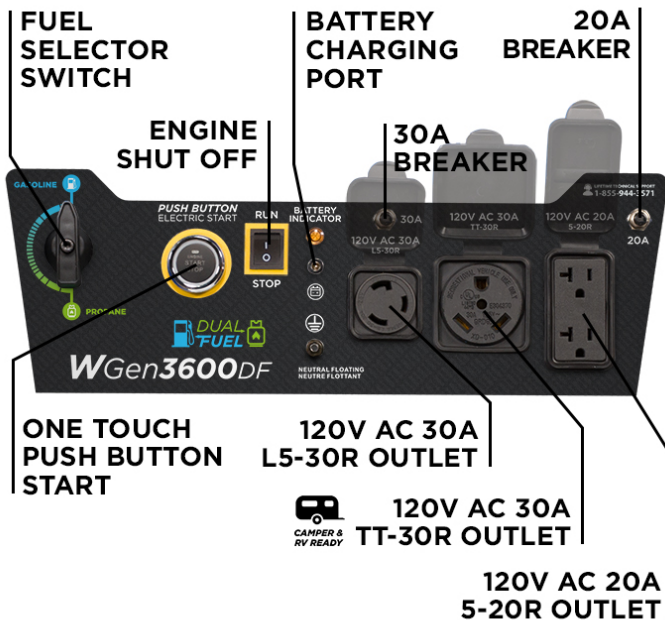

### What Comes in the Box



# WGen3600DF



Gasoline Running Watts	3600
Gasoline Peak Watts	4650
Gasoline Running Amps at 120V	30 amps
Gasoline Peak Amps at 120V	38 amps
Propane Running Watts	3240
Propane Peak Watts	4180
Propane Running Amps	27 amps
Propane Peak Amps	34.8 amps
AC Voltage	120 Volts
AC Frequency	60 Hz
Engine Horse Power (HP)	5.9 HP
Total Harmonic Distortion (THD)	<23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Remote, Recoil
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (factory paired)
Remote Start Distance (yards/meters)	109 yd. (100 m.)
Push Button Start	Yes
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine RPM	3600
Operational Volume (dBA)	as low as 69 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140567
DF Regulator Assembly (sold separate)	140560
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Propane or Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)

Gas - Run Time at %25 Load (hrs.)	18 hrs.
Gas - Run Time at %50 Load (hrs.)	13.5 hrs.
Propane - Run Time at 25% Load (hrs.) With 20 lb. Standard Propane Tank	20 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Automatic
Choke Location	Above Air Filter
AC Outlets	(1) 120V 30A (TT-30R) (1) 120V 30A (L5-30R) (1) 120V Duplex 20A (5-20R)
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	No
VFT Data Center	No
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Single Handle with Foam Grip
Wheel Kit Included	Yes
Wheel Size	8 in. Diameter, 2 in. Wide
Wheel Type	Polyurethane
Frame Thickness in. (mm)	1 in. (25 mm)
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	24 in. (610 mm)
Assembled Width in. (mm)	23 in. (584 mm)
Assembled Height in. (mm)	21.5 in. (546 mm)
Extended Length in. (mm)	34.5 in. (876 mm)
Carton Length in. (mm)	27 in. (686 mm)
Carton Width in. (mm)	19.5 in. (495 mm)
Carton Height in. (mm)	19 in. (483 mm)
Dry Unit Weight lb. (kg)	109 lb. (49 kg)
Shipping Weight lb. (kg)	114 lb. (52 kg)
UPC	855464003254
GTIN	00855464003254

0911018KD  
 ©2018 Westinghouse Portable Power  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team at [service@wpowereq.com](mailto:service@wpowereq.com) or call 855.944.3571**

